



Roof Fan With Horizontal Air Outlet



RCD-Y Series

Roof Fan With Horizontal Air Outlet

- *Galvanised sheet steel support base
- *Horizontal air outlet and aluminium rain cap
- *Backward-curved impeller. made of galvanised sheet steel.
- *Maximum temperature of air to be carried:
-25°C +120°C
- *Bird control grille.
- *Three-phase 230/400V-50Hz.
- *suitable to run with frequency inverter.
- * Class F motors with ball bearings and IP55 protection.

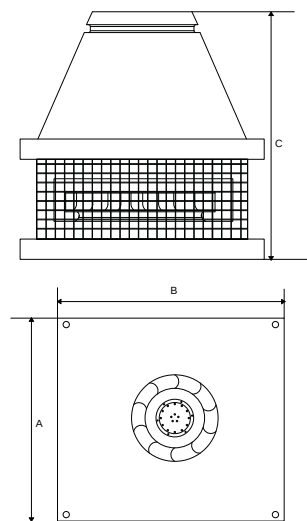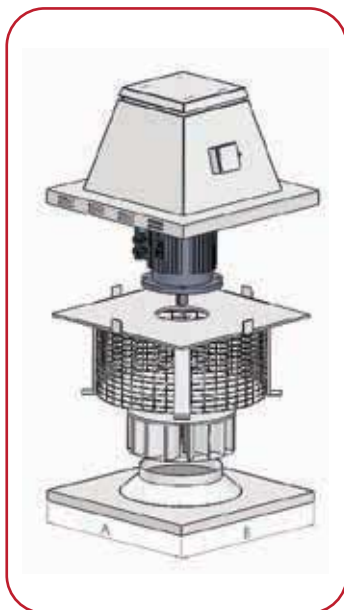

MODEL	AIRFLOW M ³ /H	PWR (KW)	SOUND (dBA)	TRANS (DK)
RCD-Y 31-2T-0,37	2800	0,37	60	2950
RCD-Y 32-4T-0,55	3000	0,55	65	1450
RCD-Y 35A-4T-0,55	3500	0,55	66	1450
RCD-Y 35B-4T-0,55	4000	0,55	67	1450
RCD-Y 40A-4T-0,75	5000	0,75	68	1450
RCD-Y 40B-4T-1,1	6000	1,1	68	1450
RCD-Y 45A-4T-1,1	7000	1,1	73	1450
RCD-Y 45B-4T-1,5	8000	1,5	73	1450
RCD-Y 50A-4T-2,2	9000	2,2	74	1450
RCD-Y 50B-4T-2,2	10000	2,2	75	1450
RCD-Y 50C-4T-3	12000	3	75	1450
RCD-Y 55A-4T-4	14000	4	76	1450
RCD-Y 55B-4T-4	16000	4	76	1450
RCD-Y 63A-4T-5,5	18000	5,5	77	1450
RCD-Y 63B-4T-7,5	20000	7,5	77	1450
RCD-Y 71A-4T-11	26000	11	80	1450
RCD-Y 80A-4T-18,5	40000	18,5	83	1450

	DIMENSIONS (mm)		
	A	B	C
RCD-Y 31-2T-0,37	400	400	370
RCD-Y 32-4T-0,55	480	480	580
RCD-Y 35A-4T-0,55	480	480	670
RCD-Y 35B-4T-0,55	480	480	670
RCD-Y 40A-4T-0,75	480	480	700
RCD-Y 40B-4T-1,1	600	600	700
RCD-Y 45A-4T-1,1	600	600	700
RCD-Y 45B-4T-1,5	600	600	700
RCD-Y 50A-4T-2,2	700	700	850
RCD-Y 50B-4T-2,2	700	700	850
RCD-Y 50C-4T-3	700	700	850
RCD-Y 55A-4T-4	700	700	935
RCD-Y 55B-4T-4	770	770	935
RCD-Y 63A-4T-5,5	820	820	1105
RCD-Y 63B-4T-7,5	820	820	1105
RCD-Y 71A-4T-11	1100	1100	1400
RCD-Y 80A-4T-18,5	1100	1100	1400