




AIR AKD-W Series

Wall Type Of Axial Smoke Fan

- *Sheet metal support base.
- *Adjustable impellers in fibreglass-reinforced polyamide-6 and AL version impellers in cast aluminium.
- *Anti-contact protective grille pursuant to standard UNE-EN ISO 12499.
- *Three-phase 230/400V-50Hz.
- *suitable to run with frequency inverter.
- *Maximum temperature of air to be carried: S1 continuous operation -20°C +40°C. S2 operation 300°C/2h. .
- *Two Speed and double air flow directions available.
- *Class H motors for S1 continuous operation and S2 emergency use. With ball bearings. IP55 protection and 1 or 2 speeds. depending on model.

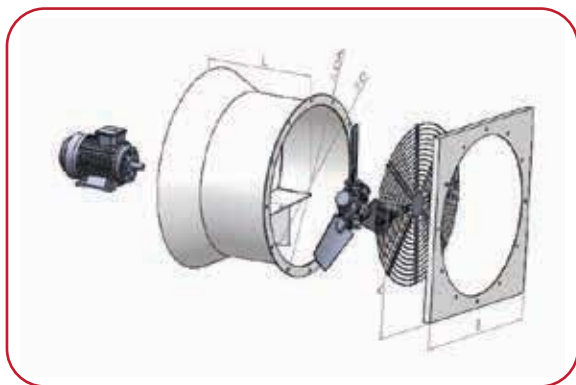

MODEL	DIMENSIONS (mm)			
	ØD	A	B	H
AIR AKD-W 31-2-4T	315	500	500	300
AIR AKD-W 35-2-4T	355	500	500	300
AIR AKD-W 40-2-4T	400	550	550	300
AIR AKD-W 45-2-4T	450	600	600	300
AIR AKD-W 50-2-4T	500	700	700	300
AIR AKD-W 63-2-4T	630	800	800	350
AIR AKD-W 71-2-4T	710	900	900	350
AIR AKD-W 80-2-4T	800	1000	1000	450
AIR AKD-W 90-2-4T	900	1100	1100	450
AIR AKD-W 100-2-4T	1000	1200	1200	550
AIR AKD-W 112-2-4T	1120	1400	1400	550
AIR AKD-W 125-2-4T	1250	1450	1450	550

